

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025:2006 and
EN 15804:2012+A2:2019/AC:2021 and
ISO 21930:2017 for:

Gyproc Gyp Filler

Version: 1

Publication date: 2024-12-18

Validity: 5 years

Valid until: 2029-12-17



THE INTERNATIONAL EPD® SYSTEM

The International EPD® System, www.environdec.com


Programme operator: EPD international AB

Registration number:

EPD-IES-0016870

EPD Type: Single product

Scope of the EPD®: Cradle-to-gate with options,
modules C1 – C4, module D and with optional
modules A4, A5 and B1 – B7

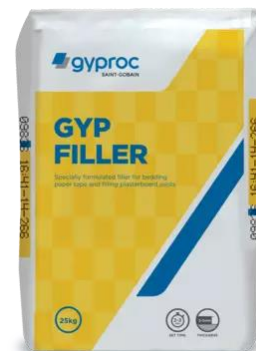

Company HQ address:

Unit 4, Kilcarbery Business Park, Nangor Road, Dublin 22,
D22 R2Y7, Ireland

General information

Company information



Manufacturer: Saint-Gobain Construction Products (Ireland) Limited

Site of manufacture: Newark, Nottinghamshire NG24 3BZ, England

Management system-related certification: ISO 14001 [1], ISO 50001 [2], ISO 9001 [3]

Product name: Gyproc Gyp Filler

EPD for multiple products: No Yes

UN CPC code: 374 – Cement, lime and plaster

Owner of the declaration: Saint-Gobain Construction Products (Ireland) Limited t/a Gyproc Ireland

EPD® prepared by / LCA accountability: Dave Dowdell (dave.dowdell@saint-gobain.com), Charnett Chau (charnett.chau@saint-gobain.com) and Fintan Smyth (fintan.smyth@saint-gobain.com)

Geographical scope of the EPD®: Great Britain (Production), Ireland (Use and End-of-life)

EPD® registration number: EPD-IES-0016870

Declaration issued: 2024-12-18 valid until 2029-12-17

Demonstration of verification: an independent verification of the declaration was made, according to ISO 14025:2010 [4]. This verification was external and conducted by the following third party based on the PCR mentioned above.

Programme information

Programme: The International EPD® System [5]

Address: EPD International AB - Box 210 60 - SE-100 31 Stockholm - Sweden

Website: www.environdec.com

E-mail: info@environdec.com

CEN standard EN 15804:2012 + A2:2019 [6] and ISO 21930:2017 [7] serve as the Core Product Category Rules (PCR)

Product category rules (PCR): PCR 2019:14 Construction Products, version 1.3.4 [8]

PCR review was conducted by: The Technical Committee of the International EPD® System
See www.environdec.com for a list of members.

Chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact - Contact via info@environdec.com

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

EPD process certification EPD verification

Third-party verifier: Matthew Fishwick, Fishwick Environmental Ltd.

Email: matt@fishwickenvironmental.com | Approved by: The International EPD® System

Signature:

Procedure for follow-up of data during EPD validity involves third-party verifier: Yes No

The EPD owner has sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Product description

Product description and description of use

This Environmental Product Declaration (EPD[®]) describes the environmental impacts of 1 kg of Gyproc Gyp Filler.

Gyproc Gyp Filler is a gypsum based setting material for bedding tapes and filling plasterboard joints. This filling compound is applied simply, and with its setting properties, it allows you to move onto the finishing phase of jointing. When used as part of a system, jointing products help linings maintain their fire performance and noise reduction so that spaces are as safe and comfortable as possible.

It is used in stages one and two of the traditional three-stage hand jointing process and can be used with Gyproc plasterboards and Glasroc[®] F MultiBoard, Glasroc F FireCase and Rigidur H.

Technical data/physical characteristics:

Reaction to fire	A1	EN13963:2005 [9]
Set time	60-90 minutes	

For further information on the product please visit the Gyproc Gyp Filler web page [10]

Declaration of the main product components and/or materials

All raw materials contributing more than 5% to any environmental impact are listed in the following table.

Product components	Mass (%)	Post-consumer material content (%)*	Biogenic carbon content (%)**
Gypsum	> 68	0	0
Limestone	>28	0	0
Other minerals	<0.1	0	0
Additives	<0.1	0	< 0.3
Total	100	0	See <i>Information on Biogenic Carbon Content</i> table
Packaging materials	Mass (kg)***	Mass (%) vs product	Biogenic carbon content (%)**
Bag (paper and PE)	<0.007	< 0.7	36 (Per DU = 0.002 kg C)
Corrugated board	<0.001	<0.1	46 (Per DU = <0.001 kg C)
Wooden pallet	0.0125	1.25	41 (Per DU = 0.005 kg C)
Total (all packaging)	0.02	2.0	See <i>Information on Biogenic Carbon Content</i> table

* The worst-case of 0% post-consumer material is declared as the amount of post-consumer content used by our suppliers is unknown. Within Sphera and ecoinvent datasets, recycled content was modelled.

** Biogenic carbon content in % is equivalent to carbon mass per overall mass of material (kg C / kg). Figure in brackets is the biogenic carbon content per the DU.

*** Packaging quantity is for a pallet load of bagged product. To fulfil orders, some product may be delivered as separated bags (estimated as 60%).

During the life cycle of the product, any hazardous substance listed in the “Candidate List of Substances of Very High Concern (SVHC) for authorization” [11] has not been used in a percentage higher than 0.1% of the weight of the product. The verifier and the program operator do not make any claim nor have any responsibility for the legality of the product.

Raw material category	Product (mass %)	Packaging (mass %)
Metals	0	0
Minerals	> 98	0
Fossil materials	0	7
Bio-based materials	<0.1	93
Other organic materials	<0.1	0
Other inorganic materials	0	0

LCA calculation information

TYPE OF EPD	Cradle-to-gate with options, modules C1-C4, module D and with optional modules A4, A5 and B1 – B7.
DECLARED UNIT	1 kg of Gyproc Gyp Filler, as installed. Mixing ratio: 1 kg powder / 0.53 litres of water. Layer thickness 2.5 mm and an applied quantity of 0.28 kg/linear m.
SYSTEM BOUNDARIES	A1-A5, B1-B7, C1-C4 and D.
REFERENCE SERVICE LIFE (RSL)	60 years [12] Gyproc Ireland provides a SpecSure® system warranty [13] for the service life of a building. SpecSure® is valid when Gyproc Ireland systems are specified, installed and finished in line with Gyproc Ireland recommendations.
CUT-OFF RULES	Where there is not enough information, process energy and materials representing less than 1% of the whole energy and mass used can be excluded (if they do not cause significant impacts). Addition of all inputs and outputs excluded cannot be bigger than 5% of the mass and energy used, as well as emissions to the environment, per module. Construction of plants, production of machines and transportation systems, (i.e. any infrastructure) are excluded since the related flows are negligible compared to the production of the product and its lifetime. However, we note that some generic datasets used in the LCA model may include capital goods and infrastructure within their system boundaries. Flows related to human activities such as employee transport are also excluded.
ALLOCATIONS	The allocation criteria are based on the mass flow of products and co-products – i.e. mass allocation between different products produced at the manufacturing site. Where raw materials and energy usage cannot be directly attributed to individual products the total quantity used in the factory was divided by the total mass of products produced to achieve materials and energy per kilogram of product. The polluter pays and modularity principles have been followed. The impact arising from the treatment of waste generated within the system boundaries is allocated to the product until waste reaches the end-of-waste state.
GEOGRAPHICAL COVERAGE AND TIME PERIOD	Scope: Great Britain (production), Ireland (use and disposal). Data is collected for manufacturing in Newark, England and a warehouse site in Kingscourt, Ireland. Manufacture data is for the 2022 calendar year. Warehouse data is for the 2023 calendar year.
BACKGROUND DATA SOURCE	Sphera Managed LCA Content (MLC) v2024.1 [14] and ecoinvent v.3.9.1 (cut-off version) [15].
SOFTWARE	Sphera LCA for Experts v10 [16].
LCA METHODOLOGY	In addition to EN 15804:2019+A2 and PCR 2019:14 v1.3.4, the study was carried out in accordance with ISO 14040:2006 [17], ISO 14044:2006 [18], and GPI for the International EPD® System v4.0 [19]. Note: EN 15804 reference package based on EF 3.1 has been used [20].
MULTIPLE PRODUCT APPROACH	Not applicable

According to EN 15804:2012+A2:2019, EPDs of construction products may not be comparable if they do not comply with this standard. According to ISO 21930:2017 EPDs might not be comparable if they are from different programmes.

LCA scope

System boundaries (X=included. MND=module not declared).


Specific data used and variations are based on the GWP-GHG indicator.

	PRODUCT STAGE			CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS / LOADS BEYOND THE SYSTEM BOUNDARY
	Raw material supply	Transport	Manufacturing	Transport	Construction-Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-recovery
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	EU/GLO			GB		EU/GLO											
Specific data used*	40.37%																
Variation products	0%																
Variation sites**	0%																

*Share of specific data that is specified according to PCR 2019:14. We gathered site-specific data on the generation of electricity provided by contracted suppliers (using Guarantee of Origin), transportation data on distances, means of transportation, load factor, fuel/other energy consumption at the site. The value in the table is calculated on the share of impact deriving from LCI data from databases on transportation and energy that are combined with actual transportation and energy parameters.

**This is the maximum GWP-GHG difference between the different products and/or the same products produced at various manufacturing sites. Where there is only one site the default value of 0% is presented.

Life cycle stages

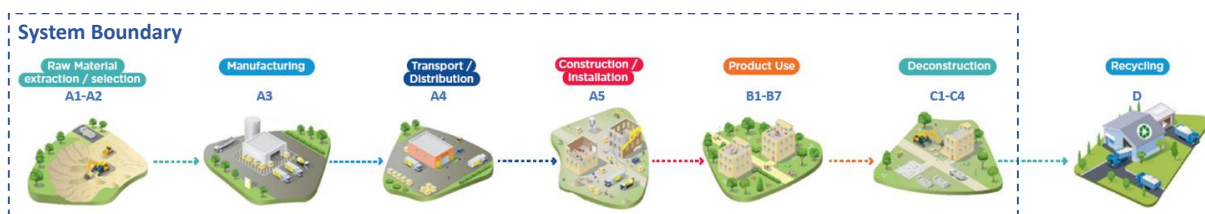

A1-A3, Product stage

Modules A1-A3 sit within the product stage of a building's life cycle, where raw and secondary materials are extracted and processed (A1) before being transported (A2) to manufacturing facilities for the production of building products (A3). Here we detail modules A1-A3 for Gyproc Gyp Filler produced at a Newark, England manufacturing site, before being transported and warehoused in Kingscourt, Ireland. Information on the supply of materials and manufacturing of the product were based on primary data. Secondary data from Sphera MLC (2024.1) and ecoinvent (3.9.1) databases were used to obtain LCIs for input materials and the processing of waste materials. Electricity used during manufacture and warehousing was modelled based on the power mix purchased with Guarantees of Origin.

Aggregation of modules A1, A2, and A3 is an option in the EN 15804 standard, which is applied in this EPD.

A1: Raw materials supply

Raw materials that are required to manufacture Gyproc Gyp Filler are supplied from UK and worldwide.

The use of electricity, fuels, and auxiliary materials required to produce these raw materials is taken into account. The environmental profile of these energy carriers is modelled for local conditions.

A2: Transport to the manufacturer

The raw materials are transported to the manufacturing site. The modelling includes road, sea and/or train transportation of each raw material.

A3: Manufacturing

See Process Flow Diagram for a complete breakdown of the manufacturing process.

In module A3, other processes modelled include:

- Manufacture of beta hemihydrate from natural gypsum.
- Use of electrically-powered mixers to combine materials according to a recipe, to produce the formulated product.
- The processing of waste arising from the manufacturing process. Manufacturing waste processing was based on reports from waste contractors, however, where processes are unavailable from Sphera and ecoinvent databases, the worst-case process was used (landfill).
- The combustion of refinery products, such as natural gas, is related to the production process.
- Packaging-related flows (e.g. wooden pallets and polypropylene packaging) in the production process and all upstream packaging are included. In addition, supply and transport of packaging material is also included. They are reported and allocated to the module where the packaging is applied. Data on packaging waste created during this step are then generated.
- Road and sea transport of packaged product to warehouse facilities in Kingscourt, Ireland.
- Warehouse operations including operation of forklifts and lighting, production of waste.


Manufacturing in detail

Formulated products such as Gyproc Gyp Filler are made at the Newark, England plant by dry mixing gypsum-based material with specific additives using recipes to achieve the desired properties. On completion of the mixing process, the resulting product is packaged in branded bags, then stacked and wrapped on pallets.

To produce a calcined gypsum input to the mixing process, gypsum rocks are quarried locally in the UK. The materials are ground and homogenised before being sent to the calcination process, to produce an alpha or beta hemihydrate base, either of which may subsequently be an input to the mixing process, depending on the formulated product being produced. Alternatively, ground gypsum (calcium sulphate dihydrate) deriving from the homogenisation process can be used as a dry mineral input directly to mixing.

The wrapped pallets of Gyproc Gyp Filler bags are transported 283 km by diesel truck (maximum load weight of 22 tonnes and an average utilisation of 85%) and 107 km by container ship (using heavy fuel oil and with a utilisation of 70%) to a warehouse in Kingscourt, Ireland, where they are stored until dispatch. To fulfil partial orders, secondary packaging may be removed from some pallet loads, so that smaller quantities of composed bags of product can be transported. This is estimated at an average of 60% of pallet loads. Removed secondary packaging is collected for recycling.

Manufacturing process flow diagram

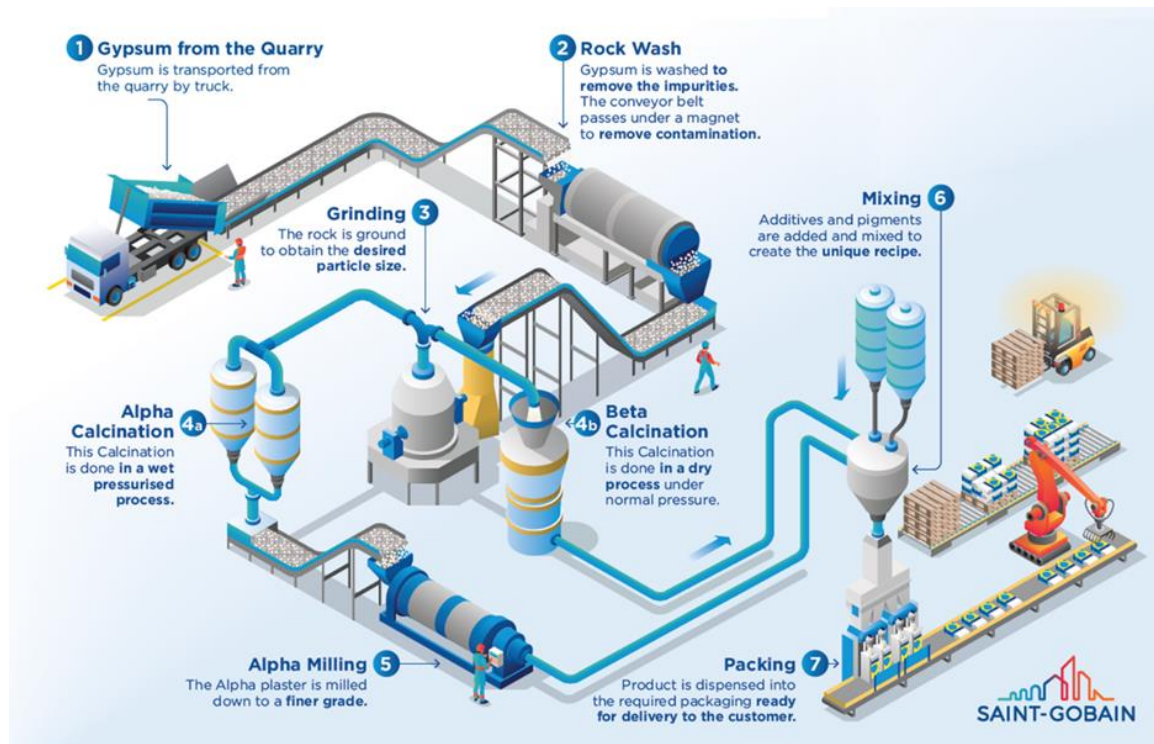

Note: Following finishing and packaging, Gyproc Gyp Filler is transported by truck to a warehouse where it is stored until dispatched to customers.

A4-A5, Construction process stage

The construction process is divided into two modules: A4, transport to the building site and A5, installation in the building.

A4: Transport to the building site

Distribution distances of products were obtained by mapping the transport distances from the Kingscourt warehouse to clients in Ireland. The average distance was then taken along with the typical mode and load of transport to form the transport scenario. All clients were included in the calculation from the year 2022, no assumptions or cut-offs were made to find the average distribution distance. Additionally, it's assumed that no product is lost, broken or wasted during transportation due to the efficiency of our courier.

NATIONAL PARAMETERS (100% OF SALES)	VALUE
Fuel type and vehicle type e.g. long-distance truck, boat, etc.	Long-distance truck: 22t payload capacity Euro 0 – 6 mix Fuel type: Diesel
Distance	82 km
Average load weight	18.7 tonnes
Average utilisation	81%

A5: Installation in the building

The scenario for installation of 1 kg of Gyproc Gyp Filler includes addition of cold water and hand mixing. Due to the product's mineral binder content, 1 kg of Gyproc Gyp Filler powder is modelled to produce 1.13 kg of set product, with remaining added water evaporating. 5% powdered product loss is assumed based on the DU, and the resupply of the losses was

modelled. Primary and secondary packaging is assumed to be landfilled. A 100 km distance is assumed for transport of waste product and packaging.

PARAMETER	VALUE/DESCRIPTION (PER kg)
Ancillary materials for installation	None (modelled)
Water use	0.53 L
Wastage output from installation	Product: 0.05 kg (100% landfilled) Bags (paper and PE): 0.0065 kg (100% landfilled) Based on warehouse estimates, 60% of product is delivered without secondary packaging: HDPE wrap: <0.0001 kg (100% landfilled) PP straps: <0.0001 kg (100% landfilled) Corrugated board: 0.0002 kg (100% landfilled) Wooden pallet: 0.005 kg (100% landfilled)
Direct emissions*	Water vapour: 0.0004 m ³

*Calculated.

B1-B7, Use stage

The use stage, related to the building fabric is separated into seven modules. The following describes the use of Gyproc Gyp Filler over its reference service life.

B1: Use (or application of the installed product)

This module represents emissions to the environment from the installed product. Emissions to the environment are not attributable to Gyproc Gyp Filler.

B2: Maintenance; B3: Repair; B4: Replacement; B5: Refurbishment

No maintenance, repair, replacement or refurbishment is required after the installation of Gyproc Gyp Filler. Therefore, no impact has been accounted in these modules.

B6: Operational energy use; B7: Operational water use

Gyproc Gyp Filler does not require any electricity or water use during operation of a building. Therefore, no impact has been accounted in these modules.

C1-C4, End of life stage

It is assumed that all Gyproc Gyp Filler waste is landfilled at the end-of-life stage.

C1: Deconstruction, demolition

Demolition requires energy for mechanical operations, which is assumed to be 0.0437 MJ / kg.

C2: Transport to waste processing

As there is no data for the transport of waste after its use, a default distance of 100 km for an average truck used at 85% capacity was assumed.

C3: Waste processing for reuse, recovery and/or recycling

No Gyproc Gyp Filler is assumed to be reused or recycled at the end-of-life stage.

C4: Disposal

100% landfill was assumed for Gyproc Gyp Filler.

PARAMETER	VALUE/DESCRIPTION
Collection process specified by type	100% collected with mixed demolition waste
Recovery system specified by type	0% recycled
Disposal specified by type	100% to landfill
Assumptions for scenario development (e.g. transportation)	Waste is transported 100 km by truck from demolition site to landfill.

D, Reuse/Recovery/Recycling potential

As no Gyproc Gyp Filler is recycled or reused, module D impact results are zero.

LCA results

As specified in EN 15804:2012+A2:2019 and the PCR 2019:14 v1.3.4, the environmental impacts are declared and reported using the baseline characterisation factors from the EC-JRC. Specific data have been supplied by the plant and warehouses, and generic data come from Sphera and ecoinvent databases.

All emissions to air, water, and soil, and all materials and energy used have been included.








The estimated impact results are only relative statements which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins or risks.

It is discouraged to use the results of Modules A1-A3 without considering the results of other modules, particularly, Modules C1 – C4.

All figures refer to a declared unit of 1 kg Gyproc Gyp Filler, as installed.

The following results correspond to a product manufactured in Newark, England and distributed from Kingscourt, Ireland.











Environmental impacts

DU: 1 kg of Gyproc Gyp Filler, as installed		PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				REUSE, RECOVERY, RECYCLING
Environmental indicators		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
			Climate change total [kg CO ₂ eq.]	1.89E-01	5.89E-03	3.88E-02	0	0	0	0	0	0	0	5.41E-03	7.75E-03	0
	Climate change (fossil) [kg CO ₂ eq.]	2.06E-01	5.87E-03	1.16E-02	0	0	0	0	0	0	0	5.40E-03	7.72E-03	0	1.32E-02	0
	Climate change (biogenic) [kg CO ₂ eq.]	-1.99E-02	2.38E-05	2.71E-02	0	0	0	0	0	0	0	1.71E-06	3.13E-05	0	8.91E-03	0
	Climate change (land use change) [kg CO ₂ eq.]	2.53E-03	2.49E-07	1.27E-04	0	0	0	0	0	0	0	4.49E-07	3.28E-07	0	9.61E-06	0
	Ozone depletion [kg CFC-11 eq.]	3.62E-08	9.29E-16	1.86E-09	0	0	0	0	0	0	0	9.49E-11	1.22E-15	0	3.12E-10	0
	Acidification terrestrial and freshwater [Mole of H+ eq.]	7.18E-04	1.18E-05	4.30E-05	0	0	0	0	0	0	0	3.05E-05	1.54E-05	0	9.40E-05	0
	Eutrophication freshwater [kg P eq.]	1.77E-05	1.24E-09	1.09E-06	0	0	0	0	0	0	0	1.55E-07	1.64E-09	0	3.46E-06	0
	Eutrophication marine [kg N eq.]	2.28E-04	5.29E-06	2.72E-05	0	0	0	0	0	0	0	1.44E-05	6.89E-06	0	3.52E-05	0
	Eutrophication terrestrial [Mole of N eq.]	2.32E-03	5.87E-05	1.42E-04	0	0	0	0	0	0	0	1.56E-04	7.64E-05	0	3.76E-04	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	7.05E-04	1.21E-05	4.74E-05	0	0	0	0	0	0	0	4.84E-05	1.58E-05	0	1.27E-04	0
	Resource use, mineral and metals [kg Sb eq.] ¹	4.86E-07	1.92E-10	2.62E-08	0	0	0	0	0	0	0	1.39E-09	2.53E-10	0	2.68E-08	0
	Resource use, energy carriers [MJ] ¹	3.80E+00	7.85E-02	2.13E-01	0	0	0	0	0	0	0	5.85E-02	1.03E-01	0	2.92E-01	0
	Water deprivation potential [m ³ world equiv.] ¹	5.27E-02	8.07E-06	2.61E-02	0	0	0	0	0	0	0	1.80E-04	1.06E-05	0	1.27E-02	0

¹ The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

Resources use









DU: 1 kg of Gyproc Gyp Filler, as installed

Resources use indicators	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				D REUSE, RECOVERY, RECYCLING
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
 Use of renewable primary energy (PERE) [MJ]	1.92E+00	4.47E-03	9.69E-02	0	0	0	0	0	0	0	4.02E-04	5.88E-03	0	4.94E-03	0
 Primary energy resources used as raw materials (PERM) ² [MJ]	3.18E-01	0	-2.39E-01	0	0	0	0	0	0	0	0	0	0	-7.93E-02	0
 Total use of renewable primary energy resources (PERT) [MJ]	2.24E+00	4.47E-03	-1.42E-01	0	0	0	0	0	0	0	4.02E-04	5.88E-03	0	-7.44E-02	0
 Use of non-renewable primary energy (PENRE) [MJ]	3.85E+00	7.85E-02	2.15E-01	0	0	0	0	0	0	0	5.85E-02	1.03E-01	0	2.92E-01	0
 Non-renewable primary energy resources used as raw materials (PENRM) ² [MJ]	4.80E-02	0	-4.80E-02	0	0	0	0	0	0	0	0	0	0	0	0
 Total use of non-renewable primary energy resources (PENRT) [MJ]	3.90E+00	7.85E-02	1.67E-01	0	0	0	0	0	0	0	5.85E-02	1.03E-01	0	2.92E-01	0
 Input of secondary material (SM) [kg]	2.23E-04	0	1.11E-05	0	0	0	0	0	0	0	0	0	0	0	0
 Use of renewable secondary fuels (RSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Use of net fresh water (FW) [m ³]	2.22E-03	4.54E-07	6.56E-04	0	0	0	0	0	0	0	4.18E-06	5.98E-07	0	2.95E-04	0

² Based on Option A per Annex 3 of PCR 2019:14 v1.3.4.

Waste category and output flows

DU: 1 kg of Gyproc Gyp Filler, as installed

Waste category and output flows	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				D REUSE, RECOVERY, RECYCLING
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
 Hazardous waste disposed (HWD) [kg]	3.76E-06	3.78E-12	2.57E-07	0	0	0	0	0	0	0	3.87E-07	4.98E-12	0	1.42E-06	0
 Non-hazardous waste disposed (NHWD) [kg]	2.24E-02	6.33E-06	7.21E-02	0	0	0	0	0	0	0	3.69E-04	8.32E-06	0	1.28E+00	0
 Radioactive waste disposed (RWD) [kg]	2.58E-05	1.12E-07	1.34E-06	0	0	0	0	0	0	0	9.18E-09	1.48E-07	0	9.09E-08	0
 Components for re-use (CRU) [kg]	7.48E-03	0	3.74E-04	0	0	0	0	0	0	0	0	0	0	0	0
 Materials for Recycling (MFR) [kg]	8.90E-03	0	4.45E-04	0	0	0	0	0	0	0	0	0	0	0	0
 Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Exported electrical energy (EEE) [MJ]	5.02E-04	0	2.51E-05	0	0	0	0	0	0	0	0	0	0	0	0
 Exported thermal energy (EET) [MJ]	9.41E-04	0	4.71E-05	0	0	0	0	0	0	0	0	0	0	0	0


Optional indicators

DU: 1 kg of Gyproc Gyp Filler, as installed	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				D REUSE, RECOVERY, RECYCLING
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
Respiratory inorganics [Disease incidences]	1.22E-08	9.76E-11	7.32E-10	0	0	0	0	0	0	0	6.49E-10	1.28E-10	0	1.96E-09	0
Ionising radiation - human health [kBq U235 eq.] ³	7.71E-03	1.12E-05	4.28E-04	0	0	0	0	0	0	0	3.88E-05	1.48E-05	0	3.77E-04	0
Ecotoxicity freshwater [CTUe] ⁴	1.83E+00	3.71E-02	1.27E-01	0	0	0	0	0	0	0	2.49E-02	4.88E-02	0	1.24E-01	0
Cancer human health effects [CTUh] ³	1.15E-10	7.00E-13	6.40E-12	0	0	0	0	0	0	0	8.09E-12	9.21E-13	0	9.27E-12	0
Non-cancer human health effects [CTUh] ³	1.47E-09	2.28E-11	1.06E-10	0	0	0	0	0	0	0	1.93E-11	3.00E-11	0	8.59E-11	0
Land use [Pt]	3.52E+00	3.60E-04	2.12E-01	0	0	0	0	0	0	0	3.71E-03	4.74E-04	0	6.53E-01	0

³ The ionising radiation category deals mainly with the eventual impact of low-dose ionising radiation on the human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure, or radioactive waste disposal in underground facilities. Potential ionising radiation from the soil, radon and some construction materials is also not measured by this indicator.



⁴ The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

Additional voluntary indicators from EN 15804 (according to ISO 21930:2017)

DU: 1 kg of Gyproc Gyp Filler, as installed		PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE						END OF LIFE STAGE				REUSE, RECOVERY RECYCLING	
Environmental indicators		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change (GWP-GHG) [kg CO ₂ eq.] ⁵	2.09E-01	5.87E-03	1.18E-02	0	0	0	0	0	0	0	5.40E-03	7.72E-03	0	1.32E-02	0

⁵ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Information on biogenic carbon content

		PRODUCT STAGE
Biogenic carbon content		A1 / A2 / A3
	Biogenic carbon content in product [kg]	2.41E-03
	Biogenic carbon content in packaging [kg]*	4.53E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂.

*Takes account of the proportion of secondary packaging that is estimated to be removed at the warehouse prior to dispatch.

Additional information

Electricity information

The following information is applicable for electricity used at the Newark, England manufacturing site.

TYPE OF INFORMATION	DESCRIPTION
Electricity purchaser	Saint-Gobain Construction Products UK Ltd.
Electricity provider	Smartest Energy
Electricity mix	Hydro – 14.85%; Wind – 53.83%, Solar PV – 18.08%, Waste to Energy – 3.74%, Biomass – 3.06%, Thermal – 6.17%, Anaerobic – 0.29%
Reference year	2022
Type of dataset	Sphera Database 2024.1, all datasets reference 2022 emissions: Hydro - “GB: Electricity from hydro power Sphera” Thermal and Anaerobic - “GB: Electricity from biogas Sphera” Solar PV - “GB: Electricity from photovoltaic Sphera” Biomass - “GB: Electricity from biomass Sphera” Wind - “GB: Electricity from wind power Sphera” Waste to Energy – “GB: Electricity from waste Sphera”
GWP-GHG CO ₂ emissions kg CO ₂ eq. / kWh	Certificate issue = 0 kg CO ₂ / kWh Modelled impact = 0.0655 kg CO ₂ eq. / kWh

*Saint-Gobain Construction Products UK Ltd. is the entity that Saint-Gobain British Gypsum operate under.

The information below is applicable for electricity used at the Kingscourt, Ireland warehouse site.

TYPE OF INFORMATION	DESCRIPTION
Electricity purchaser	Saint-Gobain Construction Products (Ireland) Ltd.
Electricity provider	Flogas Enterprise Limited
Electricity mix	Wind – 80.4%, Biogas – 19.6%
Reference year	2022
Type of dataset	Sphera Database 2024.1, all datasets reference 2022 emissions: Biogas - “GB: Electricity from biogas Sphera” Wind - “GB: Electricity from wind power Sphera”
GWP-GHG CO ₂ emissions kg CO ₂ eq. / kWh	Certificate issue = 0 kg CO ₂ / kWh Modelled impact = 0.0659 kg CO ₂ eq. / kWh

Data quality

Inventory data quality is judged by geographical, temporal, and technological representativeness. To cover these requirements and to ensure reliable results, first-hand industry data crossed with LCA background datasets were used. The data were collected from internal/supplier records and reporting documents. After evaluating the inventory, according to the defined ranking in the LCA report, the assessment reflects good inventory data quality.

References

- [1] International Organization for Standardization, "ISO 14001:2015, Environmental management systems," 2015.
- [2] International Organization for Standardization, "ISO 50001:2018, Energy management systems - Requirements with guidance for use," 2018.
- [3] International Organization for Standardization, "ISO 9001:2015, Quality management systems - Requirements," 2015.
- [4] International Organization for Standardization, "ISO 14025:2010, Environmental labels and declarations — Type III environmental declarations — Principles and procedures," 2010.
- [5] EPD International AB, "The International EPD System." Accessed: Jan. 10, 2023. [Online]. Available: <https://www.environdec.com/home>
- [6] European Committee for Standardization, "EN 15804:2012 +A2:2019, Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products," 2019.
- [7] International Organization for Standardization, "ISO 21930:2017, Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services," 2017.
- [8] EPD International AB, "PCR 2019:14 Construction Products - version 1.3.4," 2024. [Online]. Available: <https://api.environdec.com/api/v1/EPDLibrary/Files/cfb8786b-c166-4d25-02ed-08dc38ee8ac8/Data>
- [9] European Committee for Standardization, "EN 13963:2005 Jointing materials for gypsum plasterboards. Definitions, requirements and test methods," 2005.
- [10] Saint-Gobain Gyproc, "Gyproc Gyp Filler | Gyproc Ireland," 2024. Accessed: Oct. 17, 2024. [Online]. Available: <https://www.gyproc.ie/products/jointing-materials/gyproc-gyp-filler>
- [11] European Chemical Agency, "Candidate List of substances of very high concern for Authorisation." Accessed: Jun. 07, 2023. [Online]. Available: <https://echa.europa.eu/candidate-list-table>
- [12] Royal Institution of Chartered Surveyors (RICS), "RICS professional standard: Whole life carbon assessment for the built environment (Global) (2nd edition)," 2023.
- [13] Gyproc Ireland, "SpecSure Gyproc Systems Guarantee", Accessed: Dec. 13, 2024. [Online]. Available: www.gyproc.ie/specsure
- [14] Sphera, "Product Sustainability (GaBi) Data Search," 2024. Accessed: Oct. 16, 2024. [Online]. Available: <https://sphera.com/product-sustainability-gabi-data-search/>
- [15] ecoinvent, "ecoinvent v3.9.1," 2024. [Online]. Available: <https://ecoinvent.org/the-ecoinvent-database/data-releases/ecoinvent-3-9/>
- [16] Sphera, "Life Cycle Assessment (LCA) Software LCA for Experts," 2024. Accessed: May 23, 2024. [Online]. Available: <https://sphera.com/life-cycle-assessment-lca-software/>
- [17] International Organization for Standardization [ISO], "ISO 14040:2006, Environmental management - Life cycle assessment - Principles and framework," 2006.

- [18] International Organization for Standardization, “ISO 14044:2006 +A2:2020, Environmental management — Life cycle assessment — Requirements and guidelines,” 2020.
- [19] EPD International AB, “General Programme Instructions for the International EPD System - Version 4.0,” 2021. [Online]. Available: <https://www.datocms-assets.com/37502/1617181375-general-programme-instructions-v-4.pdf>
- [20] European Commission, “European Platform on LCA | EPLCA - EN 15804 reference package.” Accessed: Jan. 16, 2023. [Online]. Available: <https://eplca.jrc.ec.europa.eu/LCDN/EN15804.xhtml>