


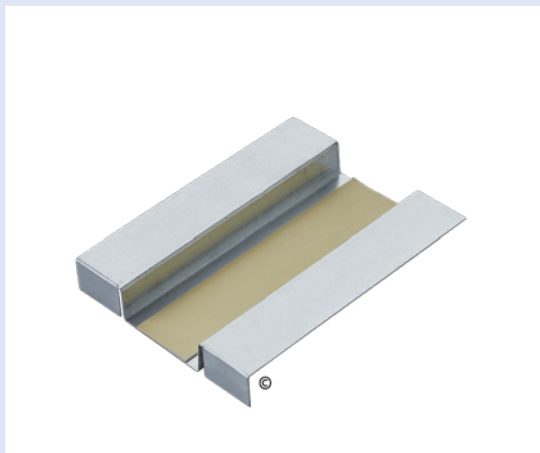

## PRODUCT DATA SHEET

# GYPFRAME® SERVICE SUPPORT PLATE 12MM

## Applications

Service Support Plate used for the installation of plywood within a partition cavity as a localised pattress.

## Product information

### Composition


Steel.

### Colour

Steel.

## DIMENSIONS AND WEIGHTS

|                          |      |
|--------------------------|------|
| Lengths available (mm)   | 130  |
| Bespoke length available | No   |
| Width (mm)               | 106  |
| Gauge (mm)               | 0.60 |
| Weight (kg/lm)           | -    |



## Performance

Here we only provide performance information related to the product. Please see the White Book online for system-dependent performance.

## Standards

No harmonised standard.

|                                     |                                                                                                                                               |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Reaction to fire                    | No performance determined, please contact Technical Support on <a href="http://gyproc.ie">gyproc.ie</a> for product component risk assessment |
| Yield strength (N/mm <sup>2</sup> ) | 140                                                                                                                                           |

## Installation

Please see our White Book online for more information about installing and handling Gyproc systems and Gypframe profiles. See the Gypframe Safety Data Sheet for guidance on health and safety, handling and storage.

## Fixing compatibility

Check the system specification for the required Gyproc screw type.

## Storage

The products should be stored inside on a flat and stable surface, away from any sources of moisture, heat or direct sunlight. If storing on a concrete floor, use dry timber platforms.

The products should not be stored near any edges, openings, walkways or traffic areas, where they could fall or cause obstruction.

## Safety Data Sheet

Safety data sheet (SDS) available on [www.gyproc.ie](http://www.gyproc.ie)

## Packaging overview

Supplied in a cardboard box.

|                   |     |
|-------------------|-----|
| Quantity per pack | 100 |
|-------------------|-----|

## Environmental

### Recyclability

Gypframe components are 100% recyclable.

### Disposal

Waste from Gypframe metal framing components is fully recyclable. The European Waste Catalogue code is 12 01 01.

**Freephone ROI:** 1800 744480  
**Freephone NI:** 0845 3990159  
**Email:** [tech.ie@saint-gobain.com](mailto:tech.ie@saint-gobain.com)

[www.gyproc.ie](http://www.gyproc.ie)

Gyproc, Gypframe and Glasroc are all registered trade names of Saint-Gobain Construction Products (Irl) Limited. Isover is a registered trade name of Saint-Gobain. Saint-Gobain Construction Products (Irl) Limited reserves the right to revise product specifications without notice. The information in this document was correct to the best of our knowledge at the time of publication. It is the user's responsibility to ensure that it remains current prior to use. The information in this document is for guidance only and should not be read in isolation. Users should read and familiarise themselves with all the information contained in this document and ensure that they are fully conversant with the products and systems being used, before subsequent specification or installation. For a comprehensive and up-to-date library of information visit the Gyproc website at: [www.gyproc.ie](http://www.gyproc.ie)



© Saint-Gobain Construction Products (Irl) Limited  
July 2026 | PDS Gypframe® Service Support Plate 12mm

