


# CASOLINE MF CEILING



SOUND PROOFING



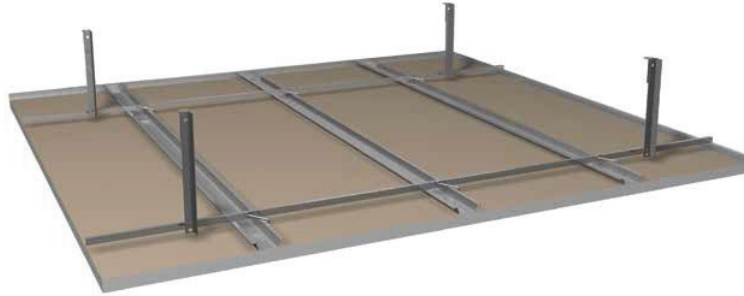





**CasoLine MF is a robust suspended ceiling that can be used in conjunction with Gyproc SoundBloc plasterboard to maximise the degree of sound insulation between floors in your home.**

## Installation

Gypframe MF6 Perimeter Channels are fixed to the perimeter walls at 600mm centres. Gypframe MF8 Strap Hanger is secured to Gypframe MF12 Soffit Cleats with Gypframe MF11 Nuts and Bolts to form hangers. These hangers are then fixed to the soffit at the required centres. Gypframe MF7 Primary Support Channels are fixed to the hangers. Gypframe MF5 Ceiling Sections are then fixed to the underside of the Gypframe MF7 Primary Support Channels to form a grid. Install 100mm Isover Acoustic Roll and then Gyproc SoundBloc is screw fixed to the Gypframe MF5 Ceiling Sections and Gypframe MF6 Perimeter Channels.

## Components needed

 <p><b>CasoLine MF Metal Components</b> A concealed grid MF suspended ceiling system.</p>	 <p><b>Gyproc Wafer Head Jack-Point Screws</b> Corrosion resistant self-tapping steel screws for fixing metal to metal framing 0.8mm thick and greater.</p>	 <p><b>Gyproc Wafer Head Drywall Screws</b> Corrosion resistant self-tapping steel screws for fixing metal to metal framing less than 0.8mm thick.</p>
 <p><b>Isover Acoustic Roll</b> A mineral wool roll providing a high level of acoustic insulation in partitions.</p>	 <p><b>Gyproc SoundBloc</b> Plasterboard with a high density core for enhanced acoustic performance.</p>	 <p><b>Gyproc Drywall Screws</b> For fixing plasterboard to timber and metal frames.</p>