

GYPROC MAGNETIC

Product Data Sheet



SpecSure®

Applications

Gyproc Magnetic is designed for the finishing of a wide range of backgrounds, from low-suction (e.g. plasterboard, Glasroc F MULTIBOARD and Glasroc F FIRECASE, sufficiently flat concrete and other flat surfaces treated with bonding agents) through to medium suction of gypsum based undercoat plasters.

Overview

Gyproc Magnetic is a gypsum finish plaster for use on a wide range of backgrounds. It provides a smooth, inert, high quality surface which attracts magnets to internal walls and ceilings, and a durable base for the application of decorative finishes. Gyproc Magnetic is a retarded hemihydrate, pre-mixed gypsum plaster, requiring only the addition of clean water to prepare it for use.

Standards

Gyproc Magnetic complies with EN 13279-1 type B2/20/2, gypsum plaster for internal plasterwork.

Gyproc Magnetic is manufactured under a quality system independently audited and certified as conforming with ISO 9001: 2015.

Performance

Magnetic attraction


The magnetic attraction of a wall coated with Gyproc Magnetic is determined by the thickness of the material applied and the strength of the magnets used.

Fire protection

Gyproc Magnetic achieves a Euroclass A1 reaction to fire rating.

Thermal resistance

It should be assumed that Gyproc Magnetic makes a negligible contribution to thermal resistance of building elements.

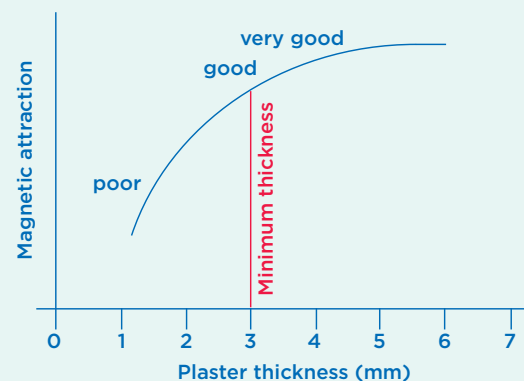

Effect of temperature

Gyproc Magnetic is not suitable for plastering onto frozen backgrounds but it may be used under frosty conditions provided that, after plastering, the surfaces are adequately protected from freezing. Once fully set and dry, Gyproc Magnetic is only suitable for situations where the temperature does not exceed 49°C. Dry, bagged plaster is not affected by low temperatures. During the application of gypsum plasters in hot and / or dry conditions, care should be taken to ensure that rapid loss of water is avoided. Gypsum plasters require a proportion of the mixing water in order to set and achieve full strength. If the water is dried off too rapidly, the strength of the plaster will be impaired.

Effect of condensation and other moisture

Gyproc Magnetic should be protected from continuous exposure to moisture. Prolonged or repeated exposure to moisture may cause a loss of strength and / or adhesion.

Installation

General

Gyproc Magnetic should be applied between a minimum depth of 3mm and an optimum depth of 6mm.

Background preparation

Plasterboards (excluding moisture resistant grade boards): Skimming should be specified only on the face of boards, i.e. the side without a paper overlap. This will be the ivory face in the case of Gyproc WallBoard, Gyproc WallBoard PREMIUM, Gyproc DuraLine, or the coloured face of Gyproc FireLine, Gyproc Habito and Gyproc SoundBloc. Joints must be reinforced with Gyproc Paper Joint Tape.

Moisture resistant grade boards: Skim plastering should not normally be specified to Gyproc Moisture Resistant and MR grade boards. These types of board are intended for use in environments of higher than normal humidity. Where moisture resistant board options are used in shell and core construction to provide temporary resistance to high moisture conditions, they can be skimmed at a later date after the building envelope has been made weather-tight. Plaster should be applied only to the face of moisture resistant boards and pre-treatment with ThistleBond-it is required.

Glasroc F MULTIBOARD and Glasroc F FIRECASE: Skim finishing using Gyproc Magnetic should be to the smooth face of the board. Application techniques and joint reinforcement are similar to those used on plasterboards.

Undercoat plasters: Gypsum-based undercoats should be left reasonably flat and with a scratch key. They are usually finished when set but not dry - if they are dry there will be higher suction which may need to be reduced by damping down before finishing.

Effect on electrical equipment

Gyproc Magnetic has no effect on phone, wifi, radio etc.

Identification

Gyproc Magnetic is dark grey in colour when dry. It is easy to decorate to any colour exactly as other finish plasters.

Product information

Sold in quantities of a single bag.

Coverage per bag m ²	Setting time hours	Water requirement litres	Dry set weight kg/m ²	Pallet quantity kg
5 @ 3mm thickness ¹	1.5	8.5 per bag	3.4	600kg (24 bags)

¹ For best results a minimum of 3mm should be applied.

Storage

Bags should be stored dry, as absorption of water shortens the setting time, causes set lumps to form in the bags and may reduce the strength of the set plasterwork. If storing on a concrete floor, dry timber platforms should be provided. Gyproc Magnetic stored correctly has a shelf life of 6 months and bags are printed with the manufacturing date in order to permit use in strict rotation.

Mixing

Gyproc plasters should be mixed by adding clean water to clean mixing equipment. Contamination from previous mixes adversely affects the setting time and the strength. Fresh contamination has more effect than old - so equipment should be washed just after mixing rather than just before. Gyproc finishing plasters are suitable for mixing by hand or mechanical whisk of a slow speed, high torque type. While mechanical mixing speeds the process up, there is no need to continue mixing after dispersing lumps and achieving the right consistency - over-mixing wastes time and energy, can affect setting times, lead to deterioration in workability and create difficulty in achieving a flat finish.

Installation

Plastering to board backgrounds: Plaster is applied with firm pressure, built out to the required thickness in two applications and trowelled to a smooth matt finish as the plaster progressively sets. Good site practice should be followed as outlined in *I.S. EN 13914-2:2016 Design, preparation and application of external rendering and internal plastering - Part 2: Internal plastering.*

For best results; first apply a thick coat of 2-3mm, after 10-15 minutes flatten with a spatula. After a further 40-50 minutes, using a freshly mixed batch of Gyproc Magnetic, apply a second coat of 1-2mm. Trowel up as needed, avoid over polishing, avoid using water, only use damp trowel.

Angle bead is fixed to the plasterboard angle by embedding in 'dabs' of finish plaster. To hold the bead in correct alignment as the plaster sets it is recommended that additional mechanical fixings are used (non rusting nails, screws or staples) as required. Before this plaster sets, any surplus should be wiped from the corner, because scraping it away later may damage the zinc coating. If the bead is fixed to the board 'dry' the adhesion may be reduced because it is difficult to squeeze plaster between the bead and the plasterboard.

Before applying Gyproc Magnetic to Gyproc plasterboards or Glasroc F MULTIBOARD, flat joints are reinforced using Gyproc Paper Joint Tape. Gyproc Paper Joint Tape is embedded in the first coat over each joint, leaving sufficient plaster under the tape to ensure good adhesion. Gyproc Paper Joint Tape is pressed firmly into the plaster and immediately covered with a further application.

Plaster is applied to the whole surface after the joint treatment has partially set, but not dried. For joints which may be subject to more movement (including around door or window apertures, where board edges are not fully supported or on ceilings below floors which are susceptible to high deflection), Gyproc Paper Joint Tape embedded in the finish provides better resistance to cracking than fibre tapes.

Plastering to undercoat plasters: Apply with firm pressure, built out to the required thickness in two applications and trowel to a smooth matt finish as the plaster progressively hardens through setting or by loss of water into the background. If background suction is excessive, dampen it down before finishing. For best results; first apply a thick coat of 2-3mm, after 10-15 minutes flatten with a spatula. After a further 40-50 minutes, using a freshly mixed batch of Gyproc Magnetic, apply a second coat of 1-2mm. Trowel up as needed, avoid over polishing, avoid using water, only use damp trowel.

Decoration

Gypsum-based plasterwork must always be thoroughly dry before decorating. Plaster surfaces can be decorated with most proprietary paint finishes and will accept the majority of wall covering adhesives. The manufacturers' recommendations in respect of applied decorative treatments should always be followed.

Maintenance

Gyproc Magnetic on plasterboard provides a plastering system suitable for moderate impact / wear areas. When used over undercoat plasters the resistance to minor casual damage is good, while the resistance to damage from greater impacts depends also on the undercoat used. If the plaster is correctly applied, it should not require any form of maintenance.

Freephone ROI: 1800 744480

Freephone NI: 0845 3990159

Email: tech.ie@saint-gobain.com

www.gyproc.ie

Gyproc, Gyproframe and Glasroc are all registered trade names of Saint-Gobain Construction Products (Irl) Limited. Isover is a registered trade name of Saint-Gobain.

Saint-Gobain Construction Products (Irl) Limited reserves the right to revise product specifications without notice. The information in this document was correct to the best of our knowledge at the time of publication. It is the user's responsibility to ensure that it remains current prior to use. The information in this document is for guidance only and should not be read in isolation. Users should read and familiarise themselves with all the information contained in this document and ensure that they are fully conversant with the products and systems being used, before subsequent specification or installation. For a comprehensive and up-to-date library of information visit the Gyproc website at: www.gyproc.ie